



EASY LIGHT

48V



ZigBee



MAGNETIC
TRACK
LIGHTING
SYSTEM



designed for
DIFFERENT MATERIALS

BUILT-IN
recessed in a wall
or ceiling

EASY
LIGHT .G2
Developed by Vecta Design



ErP CE CB  RoHS IES file  ZigBee  0-10V

 HOUSING COLOR	sand black / sand white / metallic gold
 CONTROL	dimming 0/1 - 10 V
 CCT	WW 3 000 K / NW 4 000 K
 CRI RA	≥ 90



EASY
to move


MAGNET
inside the LED



LINEAR LIGHT

WW 3000 K

NW 4000 K

48 V


IP 20

CRI ≥ 90

Beam angle: 110°



NAME	WIDTH	LUMEN WW 3 000 K	LUMEN NW 4 000 K	POWER
Linear Light S	306 mm	949 LM	971 LM	12 W
Linear Light L	601 mm	1952 LM	1999 LM	24 W
Linear Light XL	896 mm	2726 LM	2791 LM	36 W






LINEAR T LIGHT


WW 3000 K NW 4000 K 48 V IP 20 CRI ≥ 90



Beam angle: 110°

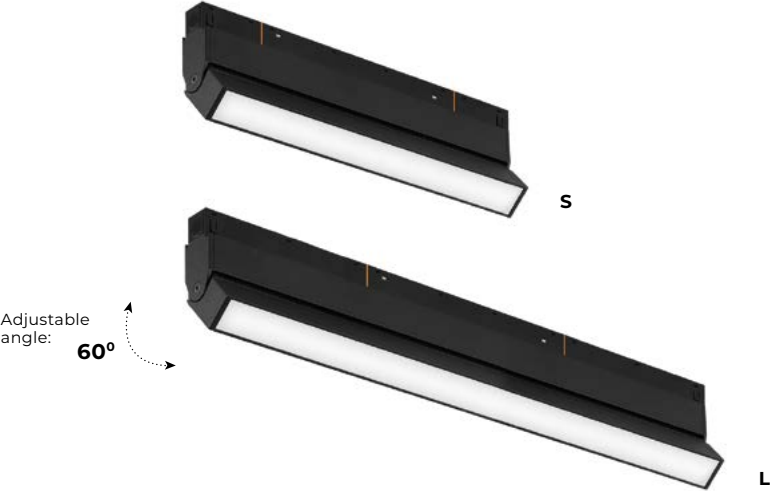

NAME	WIDTH	LUMEN WW 3 000 K	LUMEN NW 4 000 K	POWER
Linear T Light S	306 mm	946 LM	969 LM	12 W
Linear T Light L	602 mm	1907 LM	1951 LM	24 W

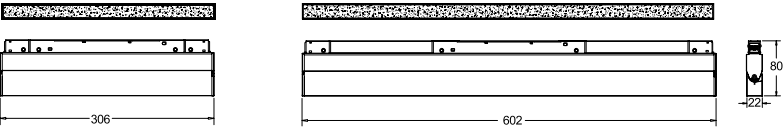



DEEP ANTI-GLARE

ALUMINIUM & ACRYLIC BODY

ANTI CORROSIVE COATING

SAND BLACK & WHITE COLOR

LINEAR LIGHT ANGLE

WW 3000 K

NW 4000 K

48 V


IP 20


CRI ≥ 90

Beam angle: 110°



NAME	WIDTH	LUMEN WW 3 000 K	LUMEN NW 4 000 K	POWER
Linear Angle Light	305 x 320 mm	1274 LM	1303 LM	16 W

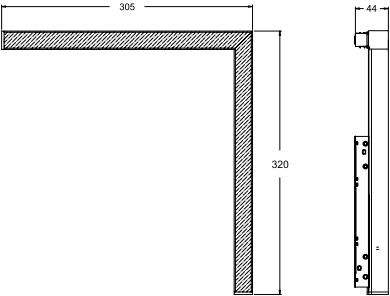

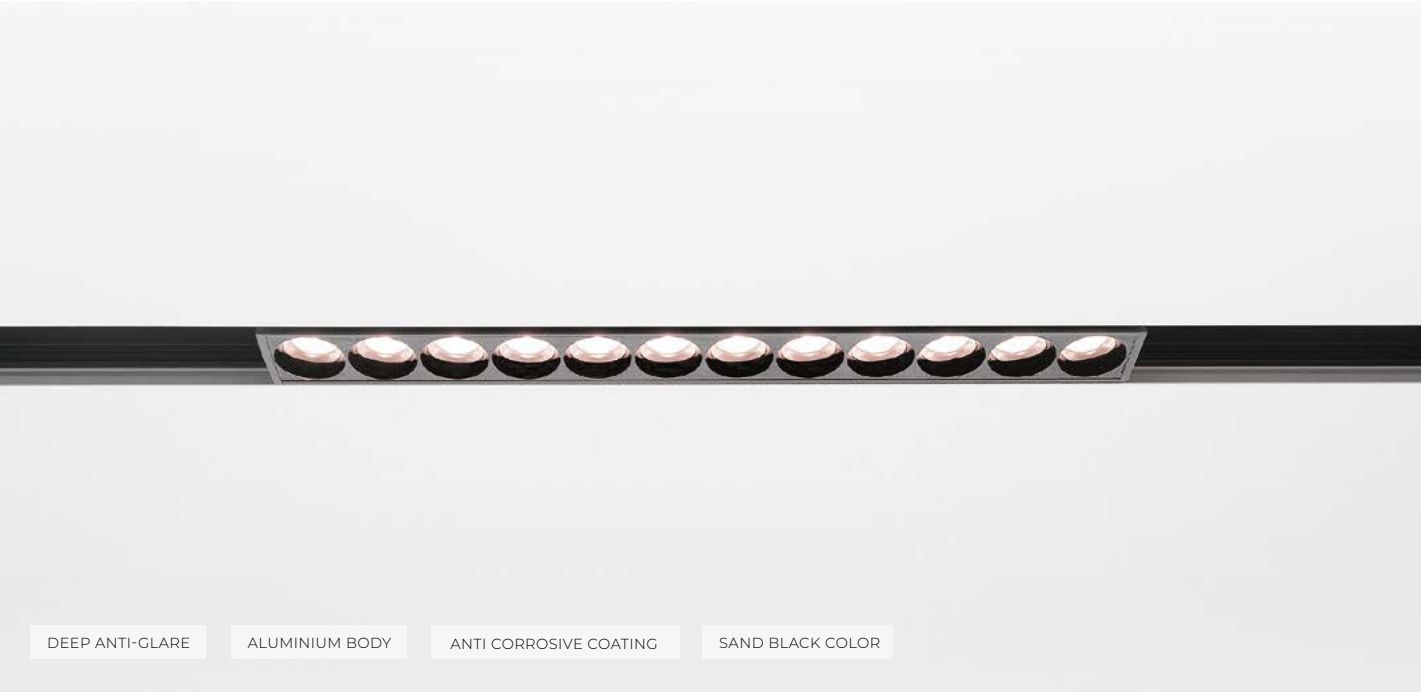

DEEP ANTI-GLARE

ALUMINIUM BODY

ANTI CORROSIVE COATING

SAND BLACK COLOR

SHADOW LIGHT

WW 3000 K

NW 4000 K

48 V

IP 20


CRI ≥ 90



Beam angle:  24°



NAME	WIDTH	LUMEN WW 3 000 K	LUMEN NW 4 000 K	POWER
Shadow Light XXS	120 mm	514 LM	525 LM	6 W
Shadow Light XS	235 mm	1024 LM	1047 LM	12 W
Shadow Light S	349 mm	1443 LM	1476 LM	18 W
Shadow Light M	462 mm	2005 LM	2050 LM	24 W
Shadow Light L	690 mm	2953 LM	3018 LM	36 W

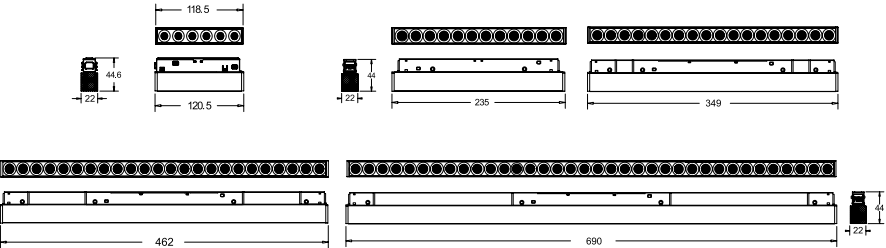




SHADOW T LIGHT


WW 3000 K NW 4000 K 48 V IP 20 CRI ≥ 90



Beam angle: 24°

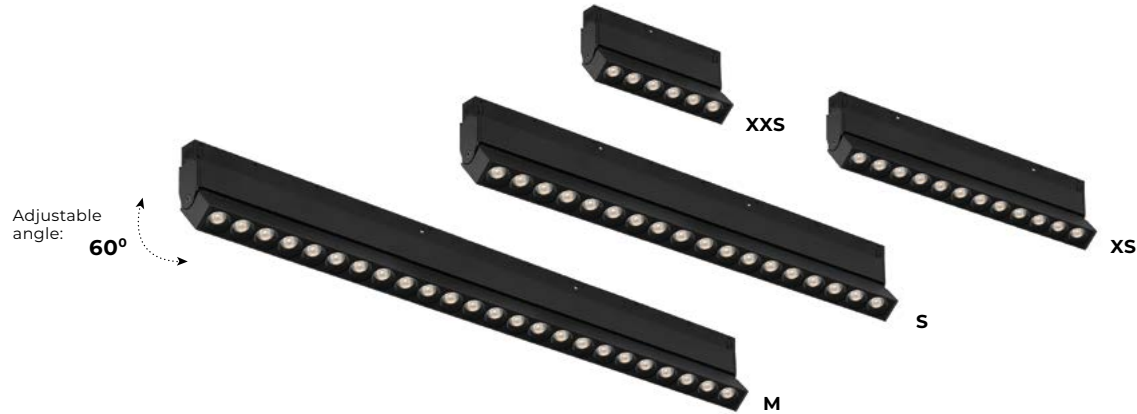

NAME	WIDTH	LUMEN WW 3 000 K	LUMEN NW 4 000 K	POWER
Shadow T Light XXS	120 mm	522 LM	533 LM	6 W
Shadow T Light XS	236 mm	1020 LM	1043 LM	12 W
Shadow T Light S	350 mm	1446 LM	1479 LM	18 W
Shadow T Light M	462 mm	1999 LM	2043 LM	24 W

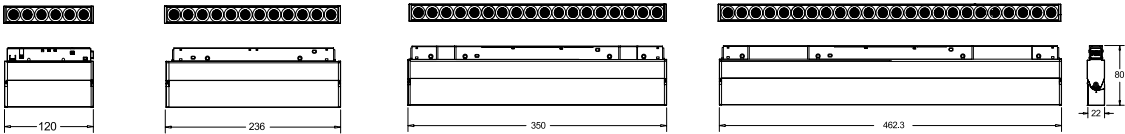




SPOT

WW 3000 K NW 4000 K 48 V IP 20 CRI ≥ 90

Beam angle: 38-40°



NAME	DIMENSIONS (visible body)	LUMEN WW 3 000 K	LUMEN NW 4 000 K	POWER
Spot S	ø34.5 x 85 mm	609 LM	623 LM	8 W
Double Spot	ø34.5 x 85 mm	1284 LM	1314 LM	16 W
Spot M	ø55.3 x 140 mm	1537 LM	1537 LM	18 W
Spot L	ø75 x 185 mm	1818 LM	1880 LM	30 W

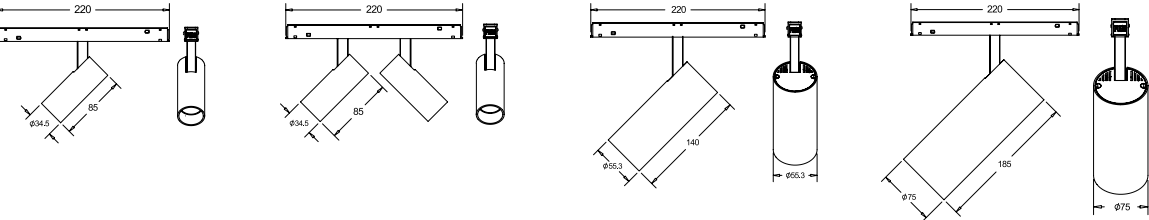



DEEP ANTI-GLARE

ALUMINIUM BODY

ANTI CORROSIVE COATING

SAND BLACK COLOR

BA SPOT

WW 3000 K

NW 4000 K

48 V


IP 20

CRI ≥ 90

Adjustable beam angle: 15-60°



NAME	DIMENSIONS (visible body)	LUMEN WW 3 000 K	LUMEN NW 4 000 K	POWER
BA Spot	ø61 x ø58 x 152 mm	1586 LM	1622 LM	20 W

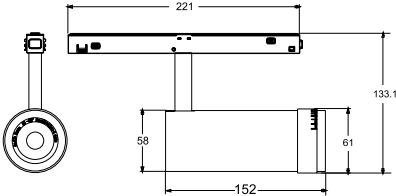



DEEP ANTI-GLARE

ALUMINIUM BODY

ANTI CORROSIVE COATING

SAND BLACK COLOR



AG SPOT

WW 3000 K

NW 4000 K

48 V


IP 20

CRI ≥ 90

Beam angle: **38°**



NAME	DIMENSIONS (visible body)	LUMEN WW 3 000 K	LUMEN NW 4 000 K	POWER
AG Spot	ø65 x 110 mm	1620 LM	1656 LM	18 W

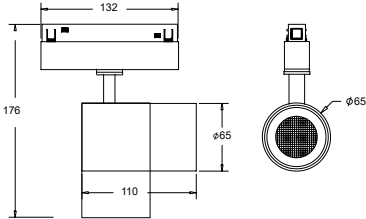




HONEYCOMB


WW 3000 K NW 4000 K 48 V IP 20 CRI ≥ 90

Beam angle: 38°



NAME	DIMENSIONS (visible body)	LUMEN WW 3 000 K	LUMEN NW 4 000 K	POWER
HoneyComb Circle	ø82 x 48 mm	1076 LM	1099 LM	12 W
HoneyComb Square	82 x 82 x 48 mm	1069 LM	1080 LM	12 W

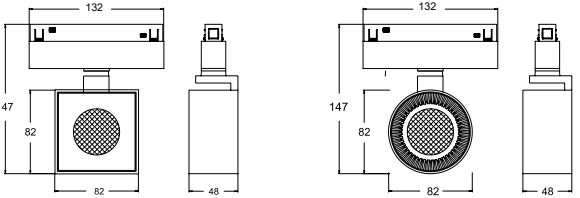

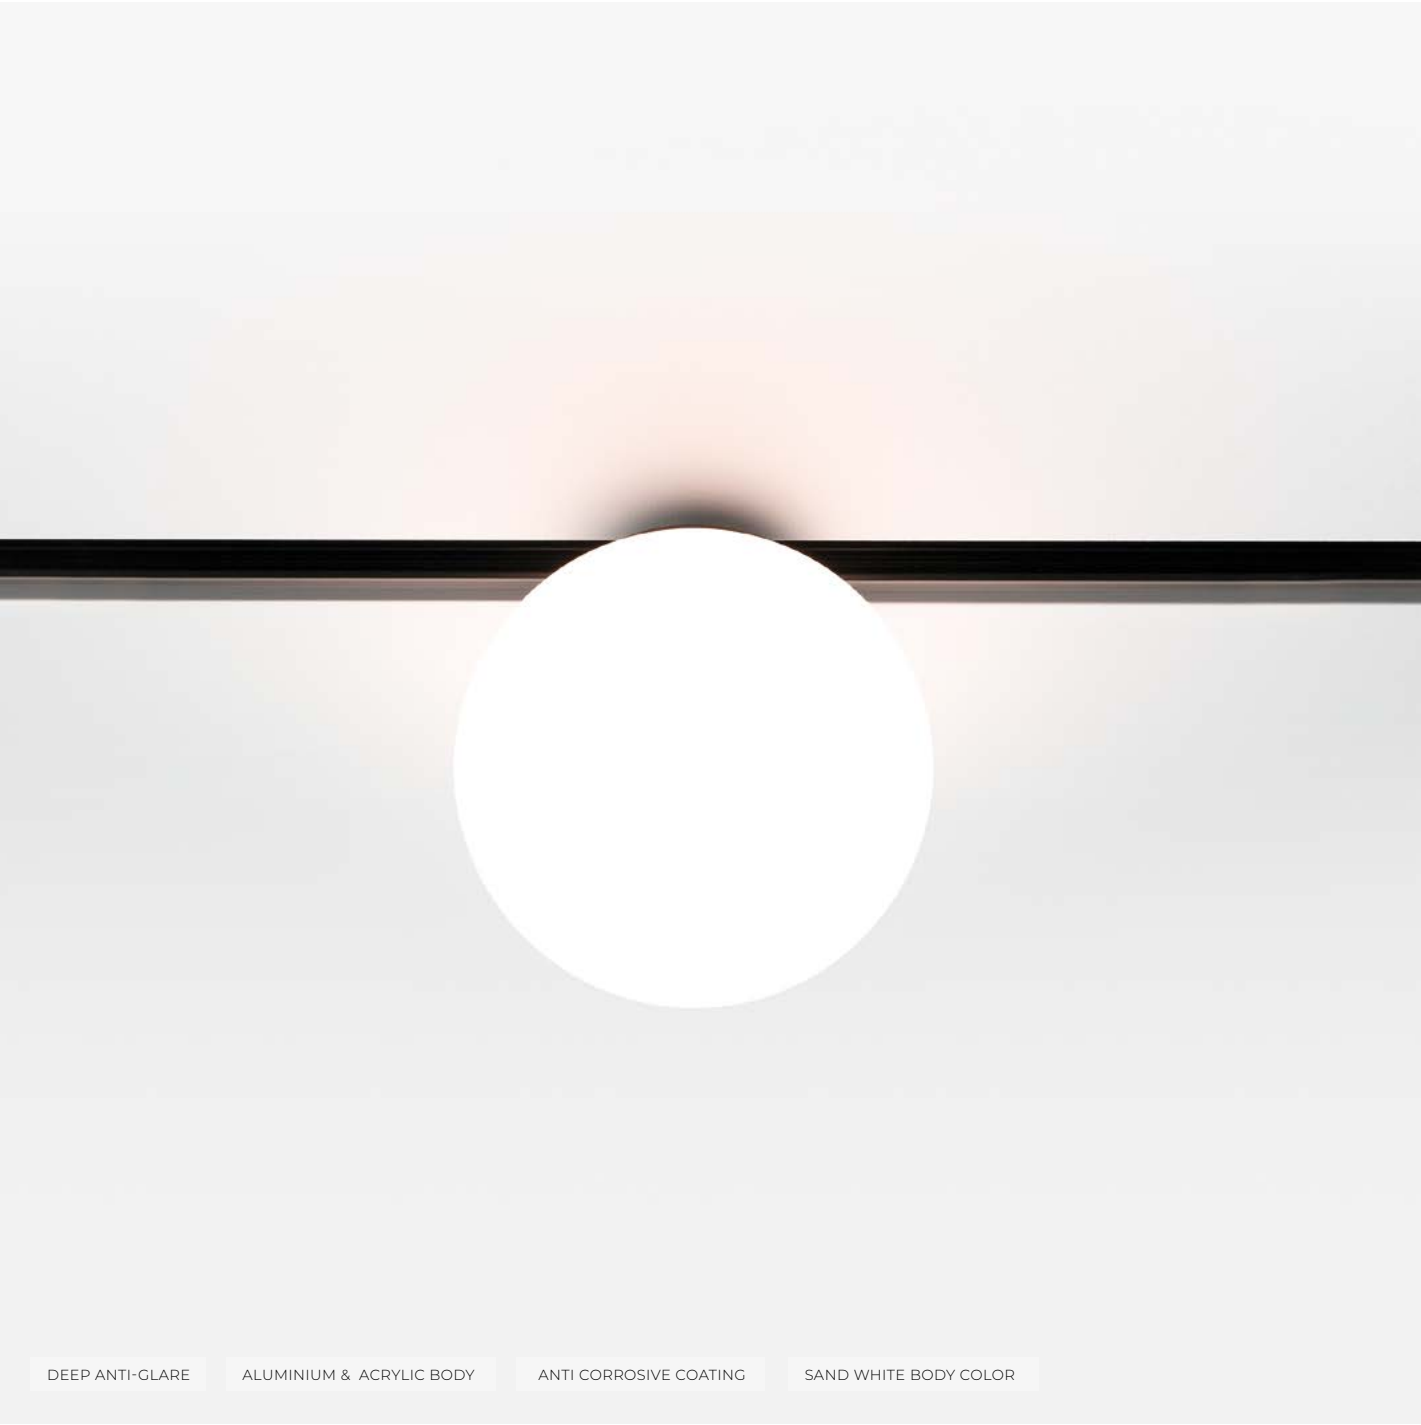

DEEP ANTI-GLARE

ALUMINIUM & ACRYLIC BODY

ANTI CORROSIVE COATING

SAND WHITE BODY COLOR

WHITE BALL

WW 3000 K

NW 4000 K

48 V


IP 20

CRI ≥ 90

Beam angle: **N/A**




NAME	DIMENSIONS (visible body)	LUMEN WW 3 000 K	LUMEN NW 4 000 K	POWER
White Ball	ø120 x 145 mm	375 LM	410 LM	6 W





- DEEP ANTI-GLARE
- ALUMINIUM BODY
- ANTI CORROSIVE COATING
- SAND BLACK COLOR

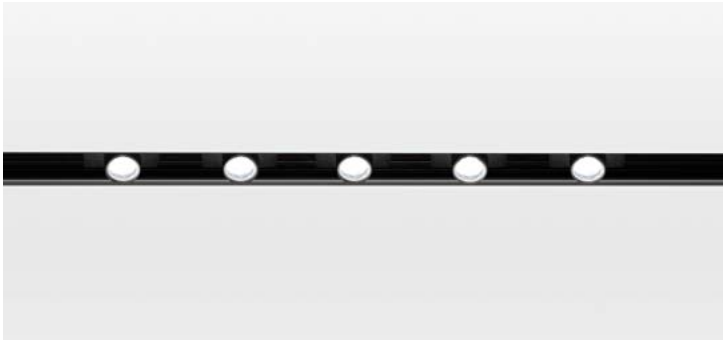

MICRO SPOT

WW 3000 K

NW 4000 K

48 V


IP 20

CRI ≥ 90

Beam angle: 38°



NAME	DIMENSIONS (visible body)	LUMEN WW 3 000 K	LUMEN NW 4 000 K	POWER
Micro Spot	ø23 x 25 mm	180 LM	184 LM	2 W







SHADOW SPOT

WW 3000 K NW 4000 K 48 V IP 20 CRI ≥ 90

Beam angle: 24°

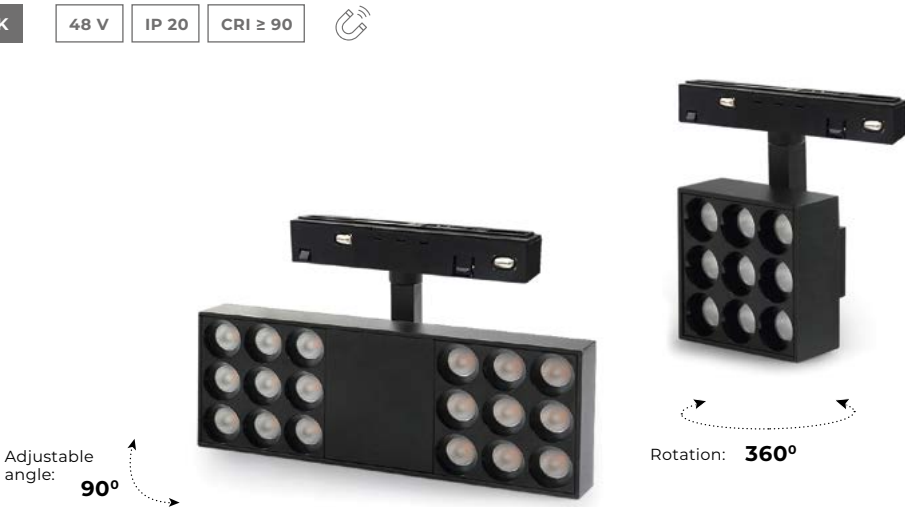

NAME	DIMENSIONS (visible body)	LUMEN WW 3 000 K	LUMEN NW 4 000 K	POWER
Shadow Spot	65 x 65 x 41 mm	710 LM	736 LM	8 W
Shadow Spot Max	65 x 175 x 41 mm	1626 LM	1656 LM	18 W

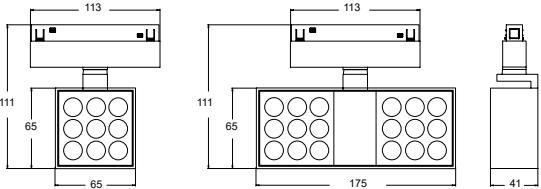



DEEP ANTI-GLARE

ALUMINIUM & ACRYLIC BODY

ANTI CORROSIVE COATING

METALLIC GOLD COLOR

PENDANT

WW 3000 K

NW 4000 K

48 V

IP 20


CRI ≥ 90

Beam angle: N/A

Cable: **Translucent**

NAME	DIMENSIONS (visible body)	POWER
Drop Pendant	ø62 x 358 mm	8 W
Blob Pendant	ø63 x 180 mm	5 W

LUMEN	DROP PENDANT	BLOB PENDANT
WW (3 000 K)	623 LM	385 LM
NW (4 000 K)	640 LM	400 LM





DEEP ANTI-GLARE

ALUMINIUM BODY

ANTI CORROSIVE COATING

SAND BLACK COLOR

ADJUSTABLE HEIGHT

SPOT PENDANT

WW 3000 K

NW 4000 K


48 V

IP 20

CRI ≥ 90


Beam angle: 40°


Adjustable Cable: **Black**

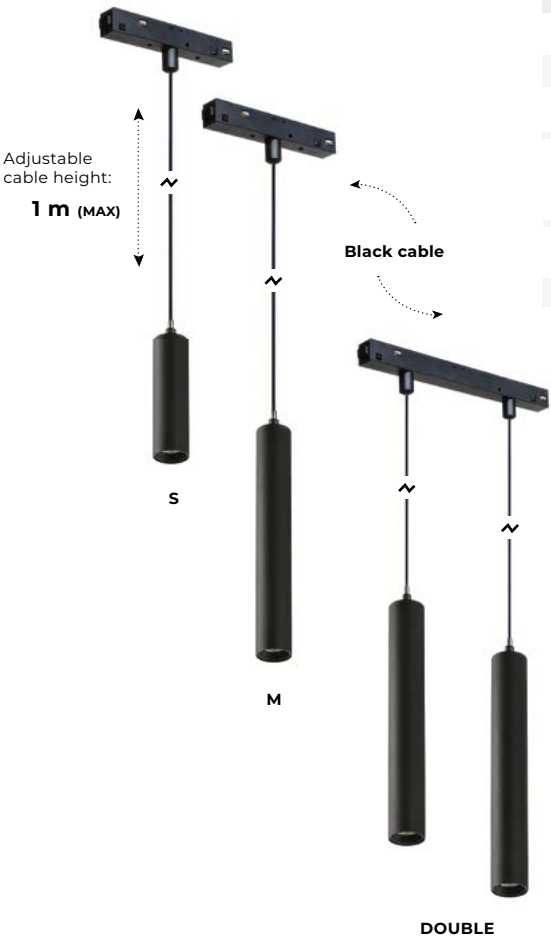

NAME	DIMENSIONS (visible body)	POWER
Spot Pendant S	ø34,5 x 200 mm	10 W
Spot Pendant M	ø34,5 x 300 mm	10 W
Double Spot Pendant	ø34,5 x 300 mm	20 W

LUMEN	SPOT P. S	SPOT P. M	DOUBLE SPOT P.
WW (3 000 K)	882 LM	882 LM	1784 LM
NW (4 000 K)	900 LM	900 LM	1820 LM

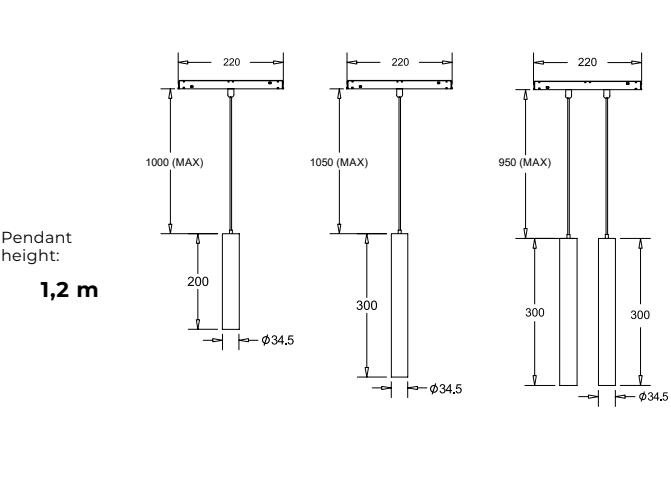

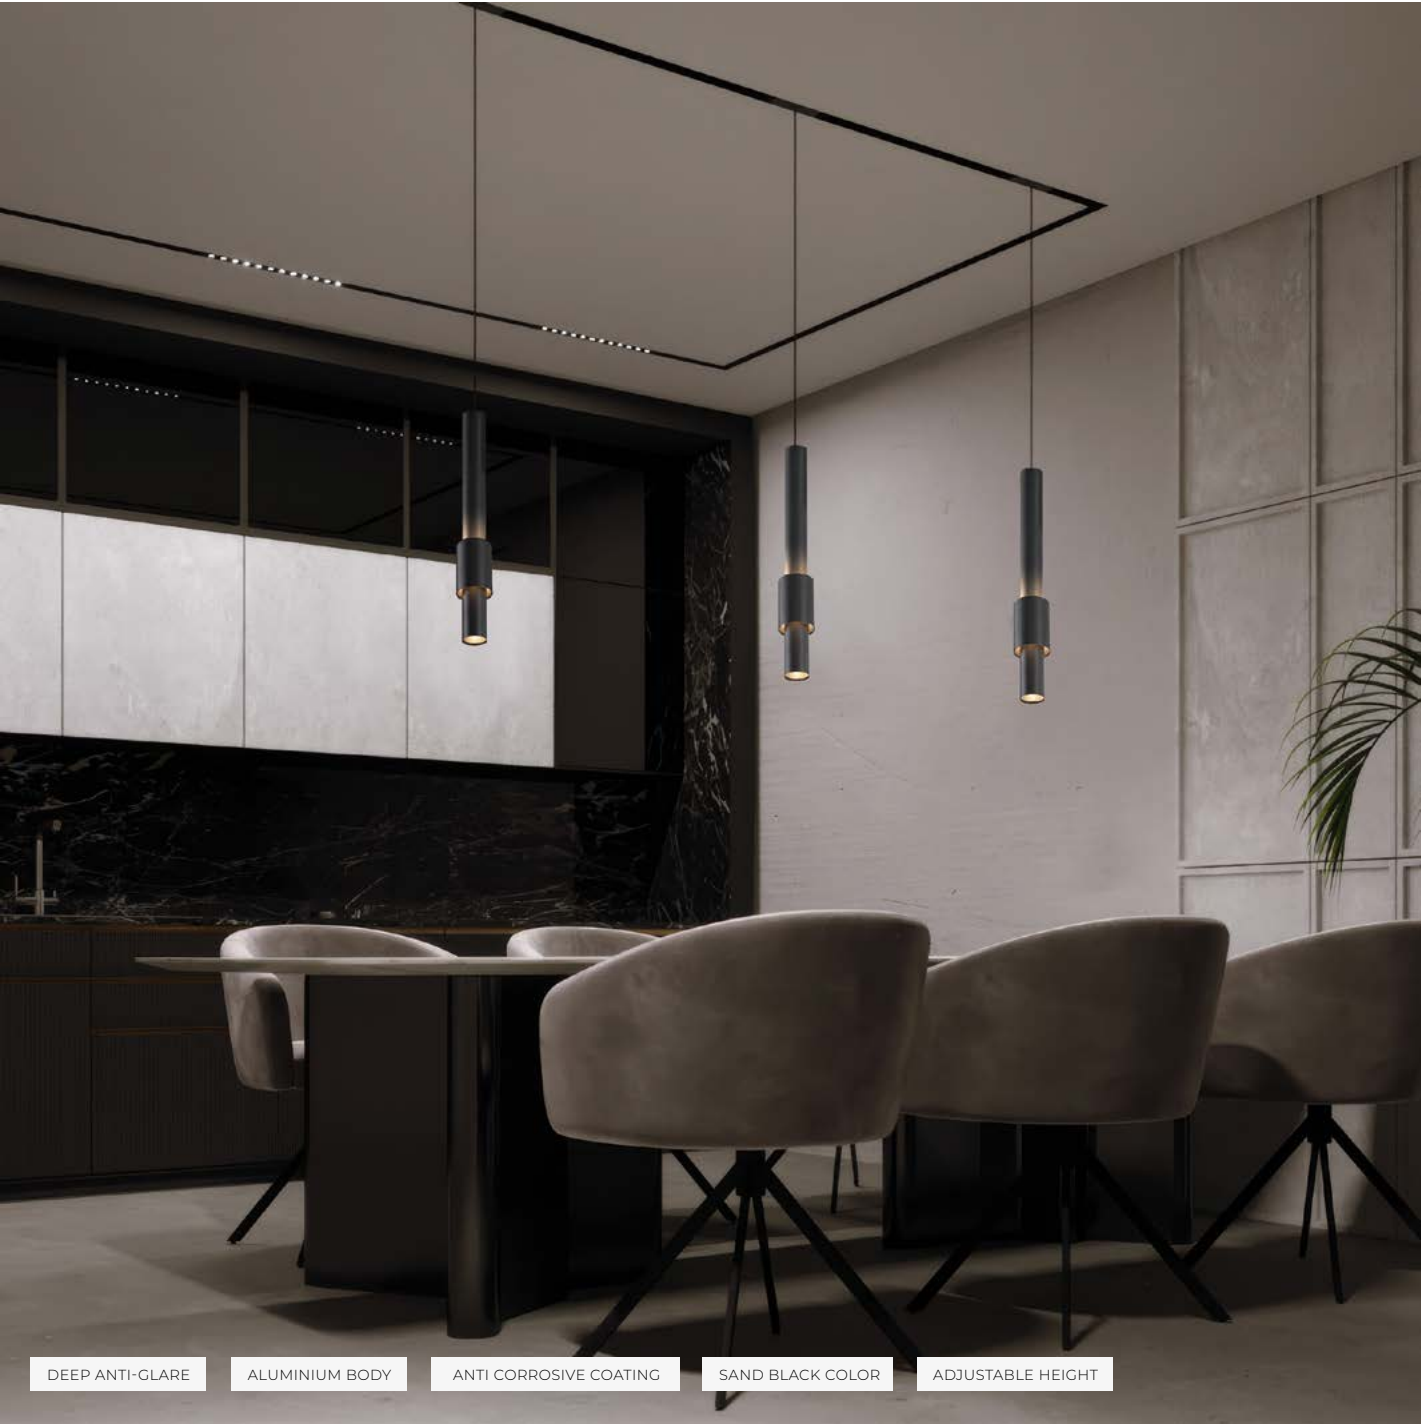

DEEP ANTI-GLARE

ALUMINIUM BODY

ANTI CORROSIVE COATING

SAND BLACK COLOR

ADJUSTABLE HEIGHT

3 SIDE SPOT PENDANT

WW 3000 K

NW 4000 K

48 V

IP 20

CRI ≥ 90


Beam angle: 38°

Adjustable Cable: **Black**

NAME	DIMENSIONS (visible body)	POWER
3 Side Spot Pendant	ø40 x 300 mm	12 W
Double 3 Side Spot Pendant	ø40 x 300 mm	24 W



LUMEN	3 SIDE SPOT P.	DOUBLE 3 SIDE SPOT P.
WW (3 000 K)	627 LM	1254 LM
NW (4 000 K)	650 LM	1300 LM

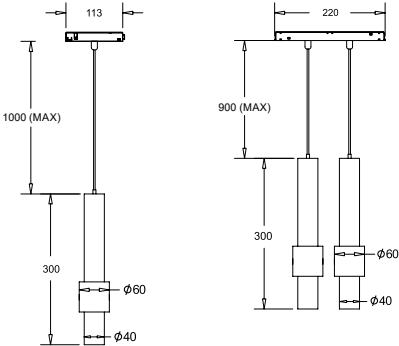



DEEP ANTI-GLARE

ALUMINIUM & ACRYLIC BODY

ANTI CORROSIVE COATING

WHITE MATT & SAND BLACK COLOR

B&W BALL PENDANT

WW 3000 K

NW 4000 K

48 V


IP 20

CRI ≥ 90


Beam angle: N/A

Cable: **Black**

NAME	DIMENSIONS (visible body)	POWER
B&W Ball Pendant	ø100	6 W
Double B&W Ball Pendant	ø100	12 W

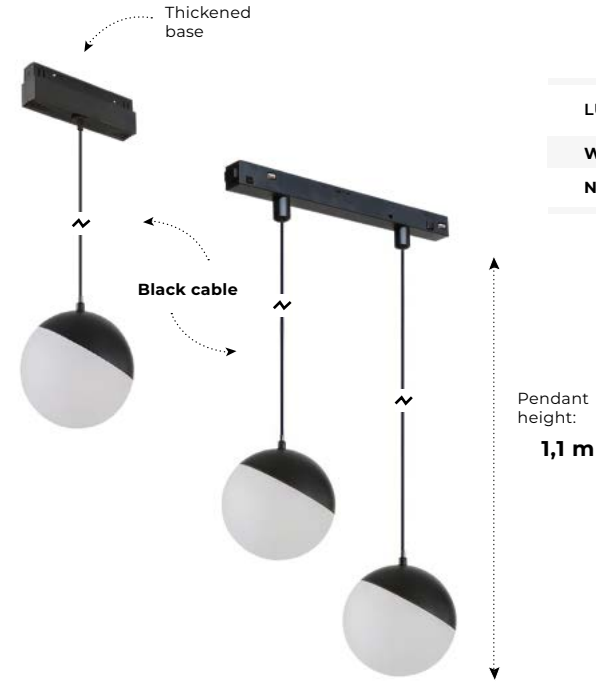

LUMEN	B&W BALL P.	DOUBLE B&W BALL P.
WW (3 000 K)	386 LM	772 LM
NW (4 000 K)	397 LM	794 LM

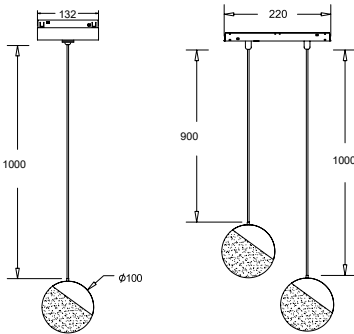



DEEP ANTI-GLARE

ALUMINIUM & ACRYLIC BODY

ANTI CORROSIVE COATING

WHITE MATT COLOR

SPHERE PENDANT

WW 3000 K

NW 4000 K

48 V


IP 20

CRI ≥ 90


Beam angle: 36°


Cable: **Black**

NAME	DIMENSIONS (visible body)	POWER
Sphere Pendant	ø80 x 74 mm	6 W
Double Sphere Pendant	ø80 x 74 mm	12 W

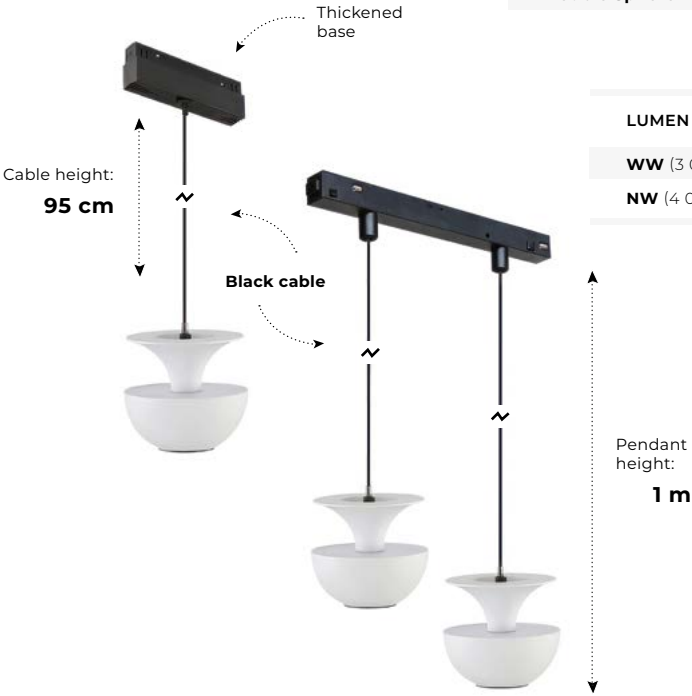

LUMEN	SPHERE P.	DOUBLE SPHERE P.
WW (3 000 K)	386 LM	772 LM
NW (4 000 K)	397 LM	794 LM

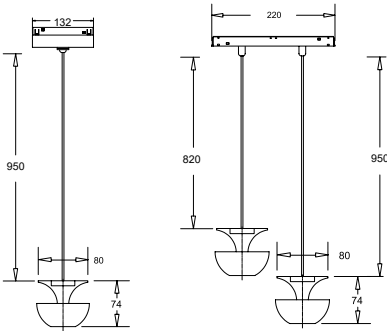

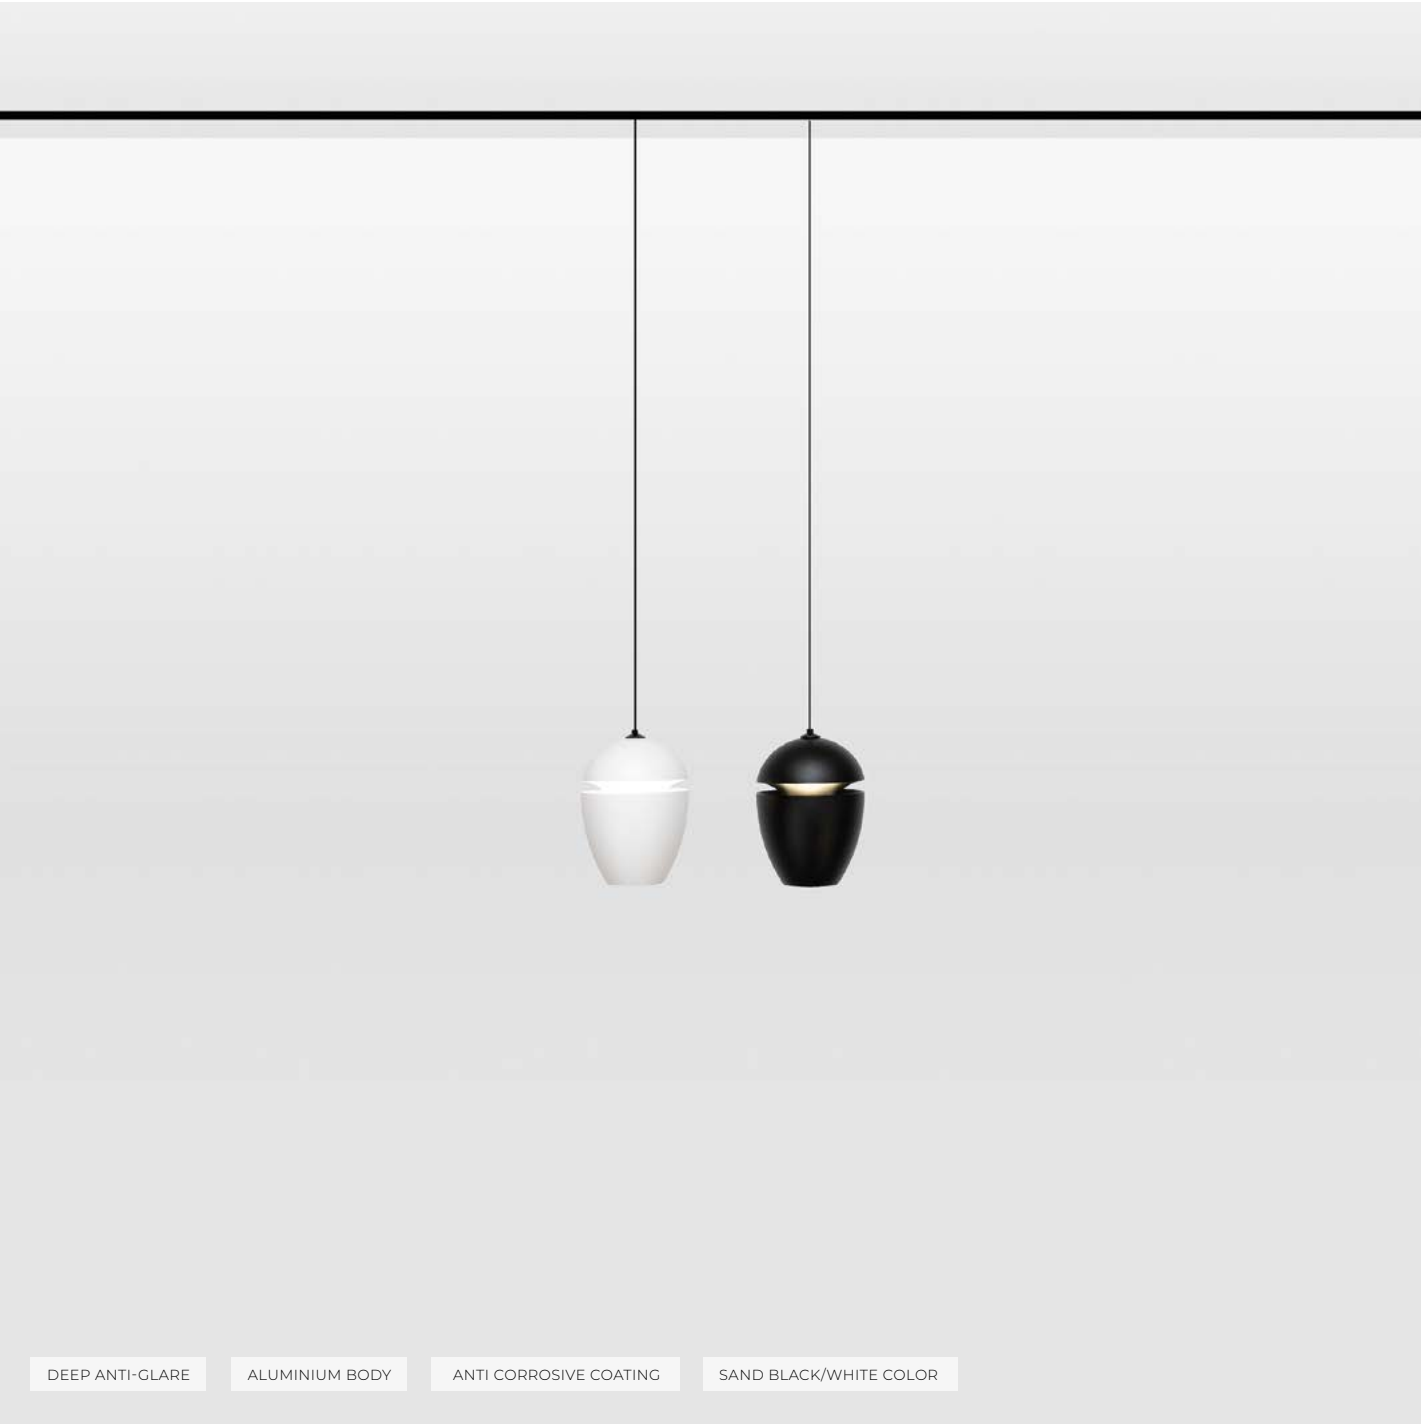

EGG PENDANT

WW 3000 K

NW 4000 K


48 V

IP 20

CRI ≥ 90


Beam angle: N/A

Cable: **Black**

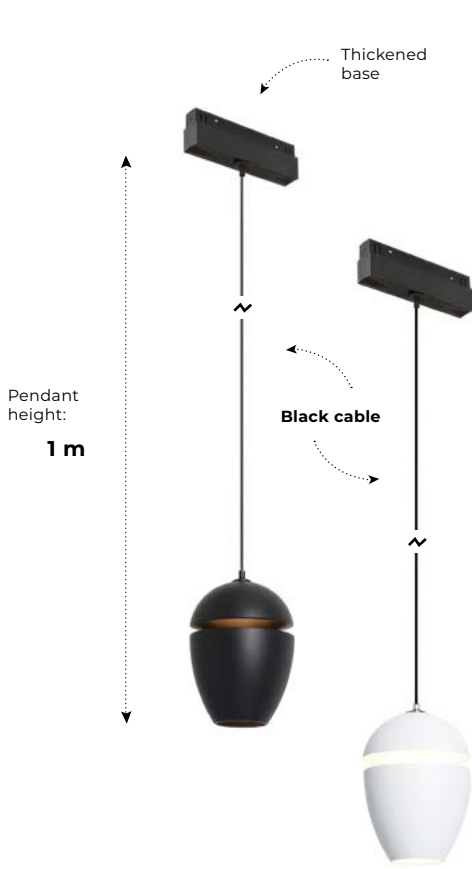

NAME	DIMENSIONS (visible body)	POWER
White Egg Pendant	ø70 x 97 mm	8 W
Black Egg Pendant	ø70 x 97 mm	8 W

LUMEN	WHITE EGG P.	BLACK EGG P.
WW (3 000 K)	386 LM	772 LM
NW (4 000 K)	397 LM	794 LM

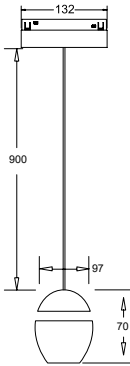



DEEP ANTI-GLARE

ALUMINIUM BODY

ANTI CORROSIVE COATING

GLASS PLAFOND

CONE G2 PENDANT

WW 3000 K

NW 4000 K

48 V

IP 20

CRI ≥ 90

Beam angle: **N/A**

Cable: **Black**

NAME	DIMENSIONS (visible body)	POWER
Gold Cone G2 Pendant	ø195 x 176 mm	6 W
Blue Cone G2 Pendant	ø195 x 176 mm	6 W
Red Cone G2 Pendant	ø195 x 176 mm	6 W

LUMEN	
WW (3 000 K)	N/A
NW (4 000 K)	N/A

Thickened base

Pendant height: **1,1 m**

Black cable

BLUE

GOLD

RED



WAVE PENDANT

WW 3000 K

NW 4000 K


48 V

IP 20


CRI ≥ 90

Beam angle: **N/A**

Cable: **Translucent**

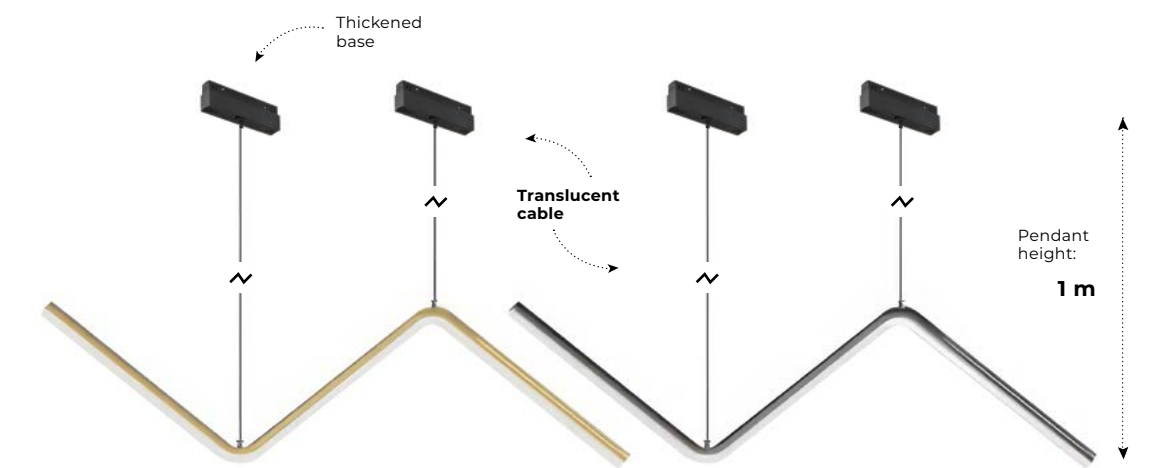

NAME	DIMENSIONS (visible body)	POWER
Black Wave Pendant	150 x 580 mm	12 W
Gold Wave Pendant	150 x 580 mm	12 W

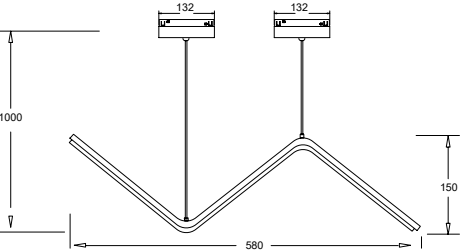

LUMEN	
WW (3 000 K)	N/A
NW (4 000 K)	N/A



DEEP ANTI-GLARE ALUMINIUM BODY ANTI CORROSIVE COATING ALLUMINIUM ALLOY & SILICONE STRIP

LINE PENDANT

WW 3000 K

NW 4000 K



48 V

IP 20

CRI ≥ 90

Beam angle: **N/A**

Cable: **Translucent**

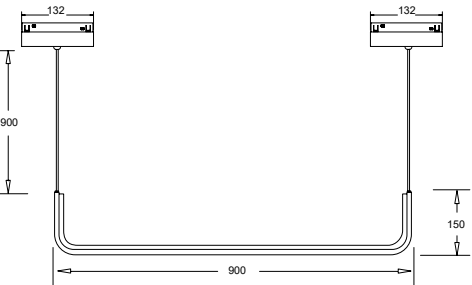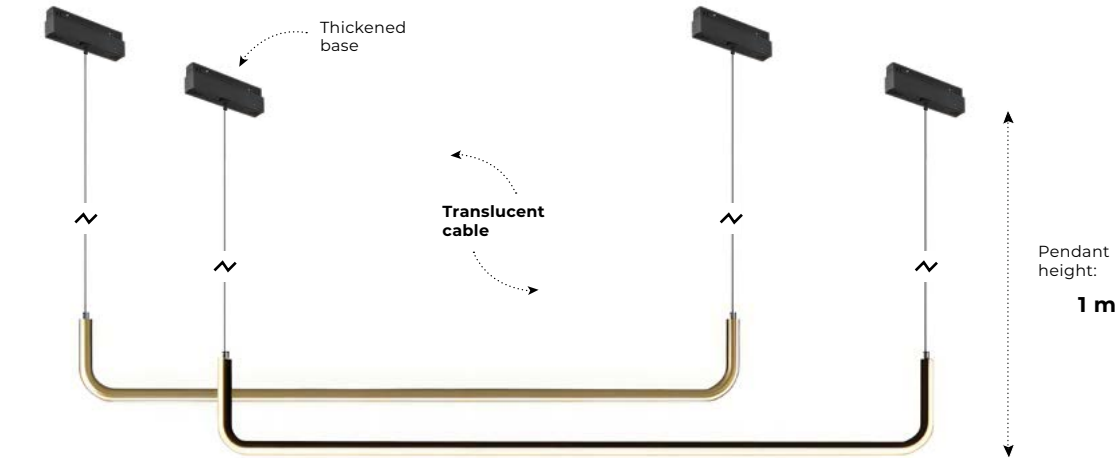

NAME	DIMENSIONS (visible body)	POWER
Black Line Pendant	150 x 900 mm	18 W
Gold Line Pendant	150 x 900 mm	18 W

LUMEN	
WW (3 000 K)	N/A
NW (4 000 K)	N/A



DEEP ANTI-GLARE

ALUMINIUM BODY

ANTI CORROSIVE COATING

ALLUMINIUM ALLOY & SILICONE STRIP

ABSTRACT PENDANT

WW 3000 K

NW 4000 K




48 V

IP 20

CRI ≥ 90

Beam angle: **N/A**


Cable: **Translucent**

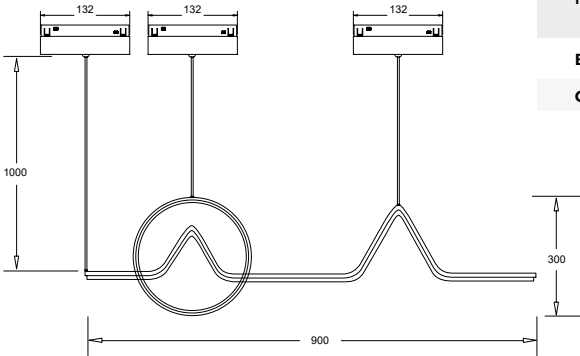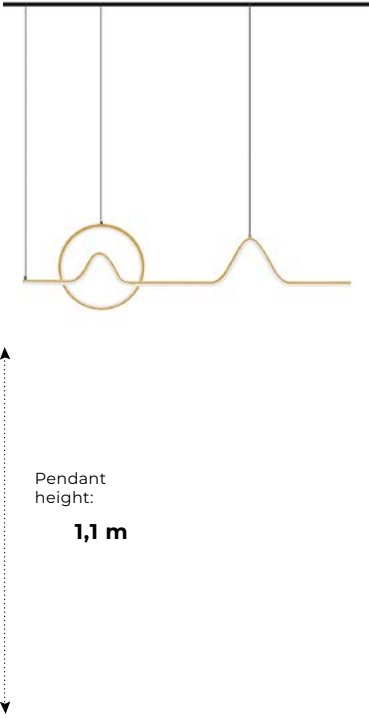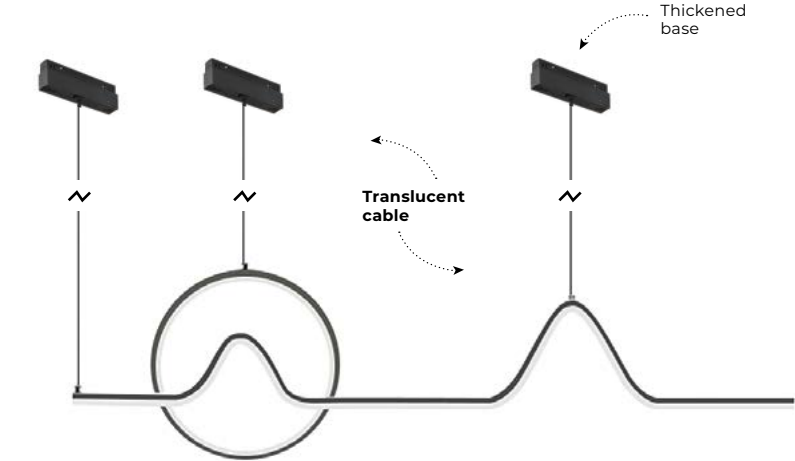

NAME	DIMENSIONS (visible body)	POWER
Black Abstract Pendant	300 x 900 mm	28 W
Gold Abstract Pendant	300 x 900 mm	28 W

LUMEN	
WW (3 000 K)	N/A
NW (4 000 K)	N/A


DETAILED ASSEMBLY DIAGRAM

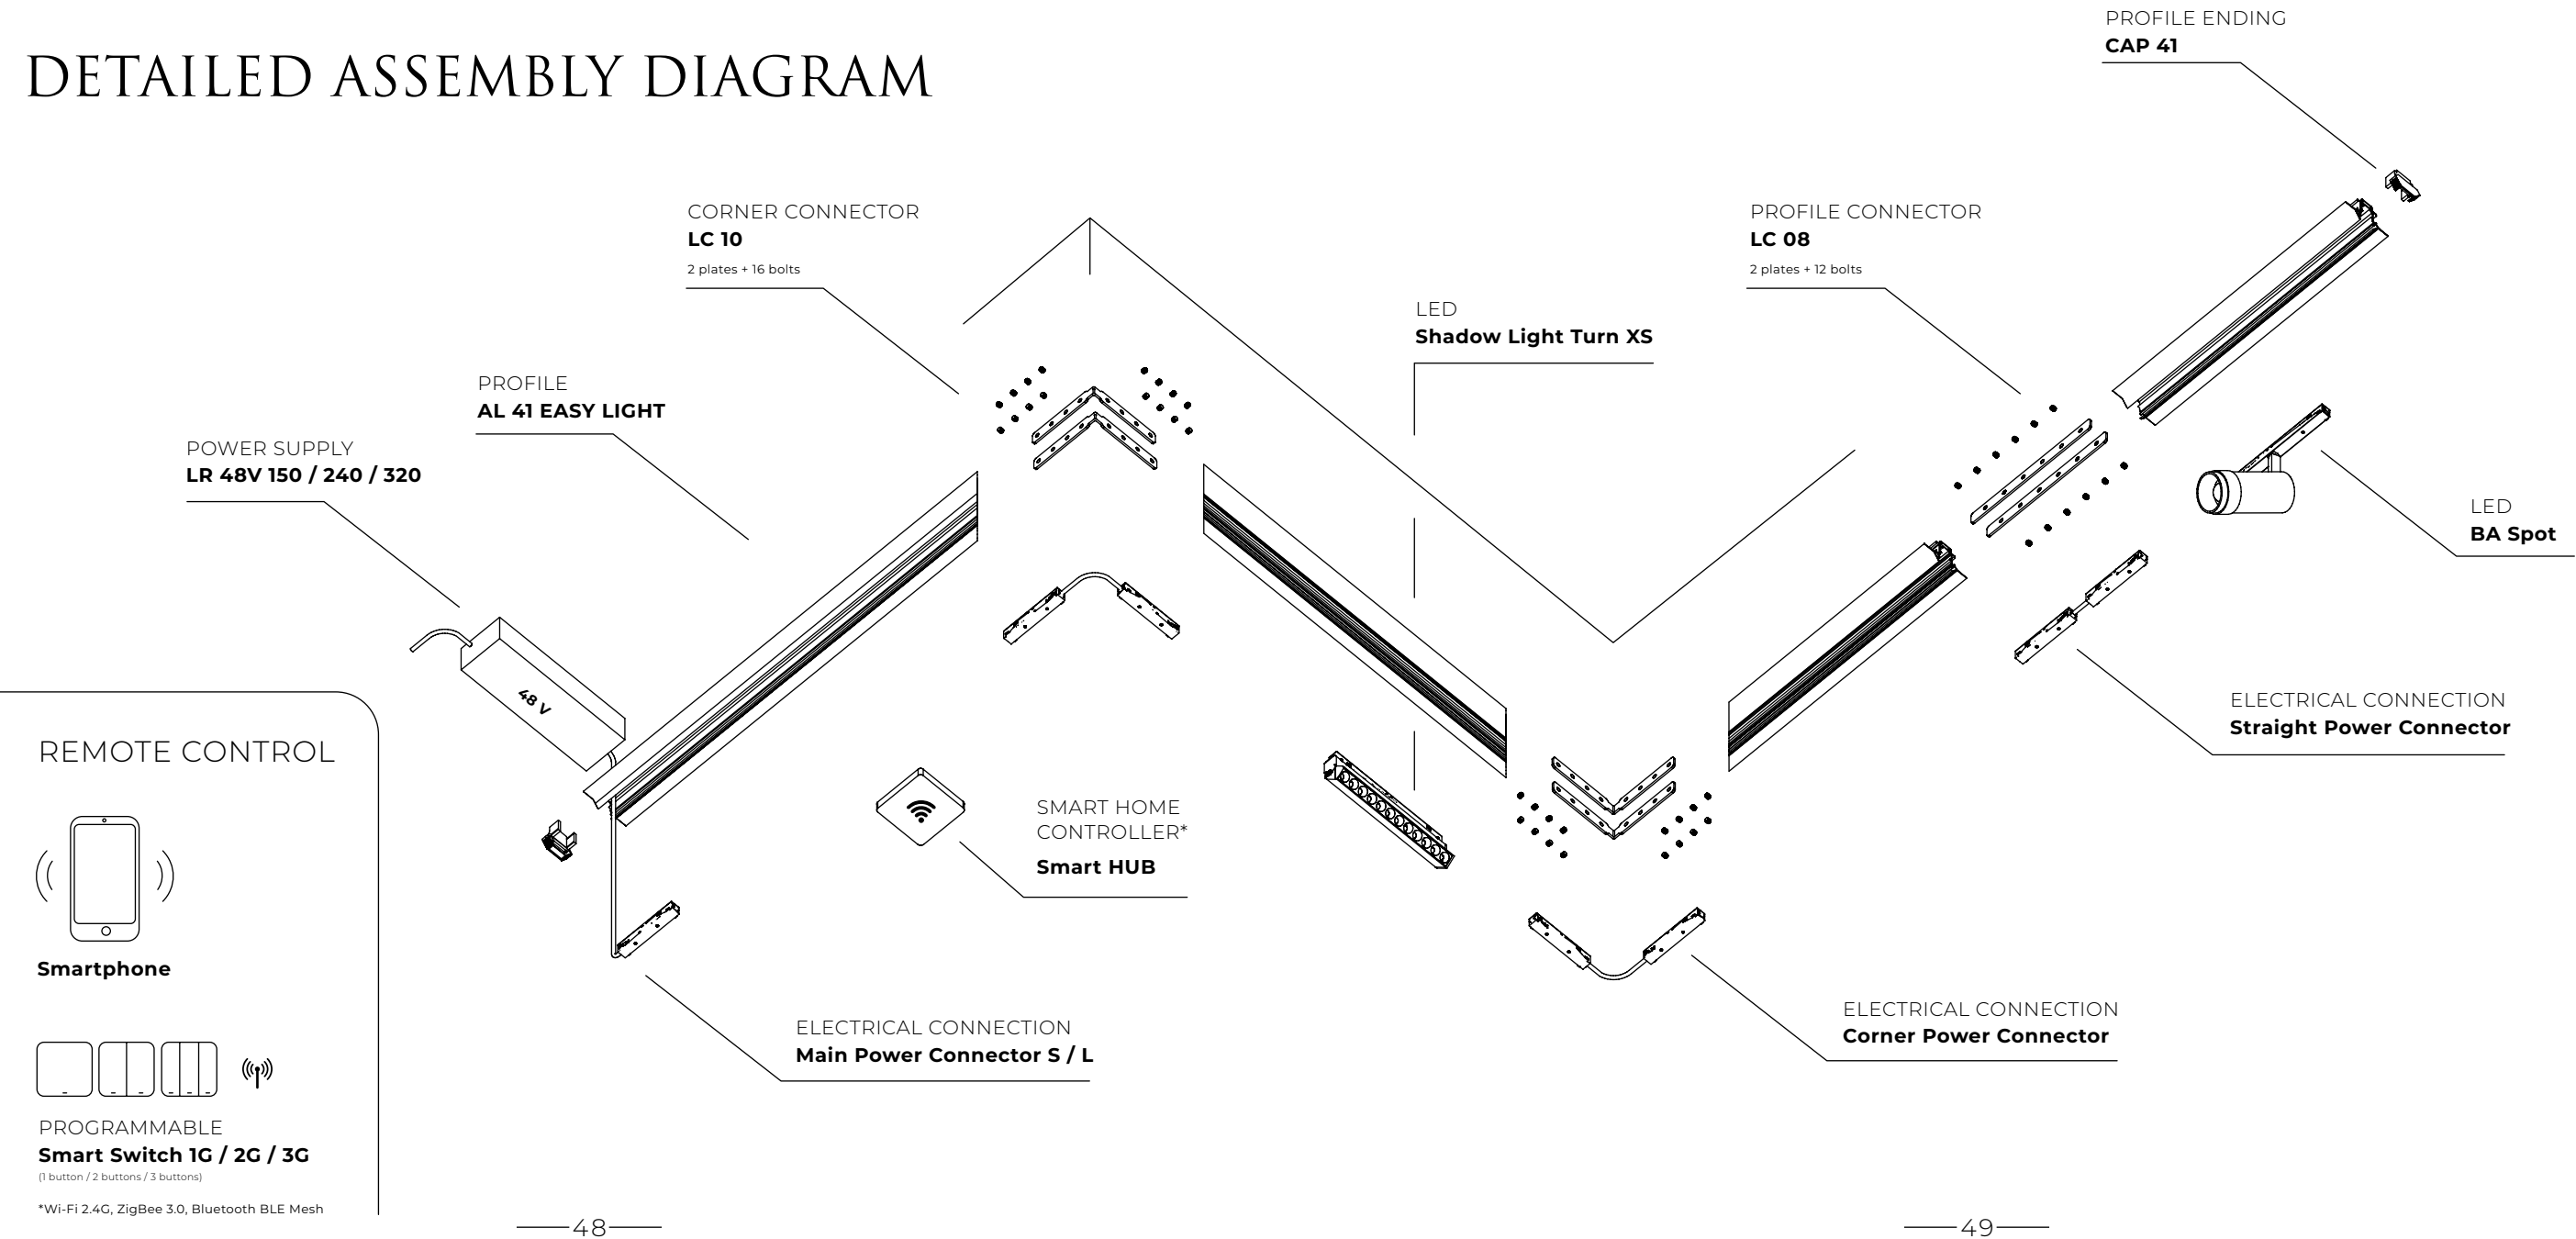

EASY LIGHT SYSTEM



AL 41 Easy Light
track profile

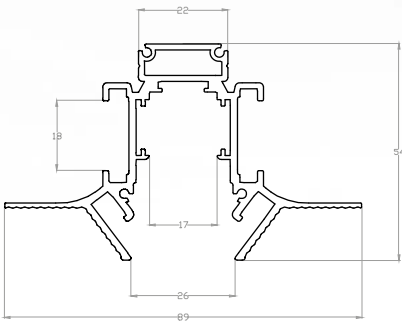

AL 41 Easy Light
profile drawing

TRACK ENDINGS



CAP 41
ending cover



CAP 41 A
wall ending adapter

POWER CONDUCTION



Straight Power Connector
for conducting power
in elongation



Corner Power Connector
for conducting power
in corners



Main Power Connector S / L
(wire length 390/2000 mm)

CONTROL



Smart S 1G - 2G - 3G
controllers with 1 - 2 - 3 button



Smart Hub
Smart Home controller

TRACK CONNECTION



LC 08
for side profile
connection



LC 10
for outside or inside
corner connection

VECTA DESIGN LTD

Pärlimõisa tee 20, Pärnu, 80010 Estonia

+372 44 23 023,
+372 55 15 394

info@vectadesign.com
www.vectadesign.com

